



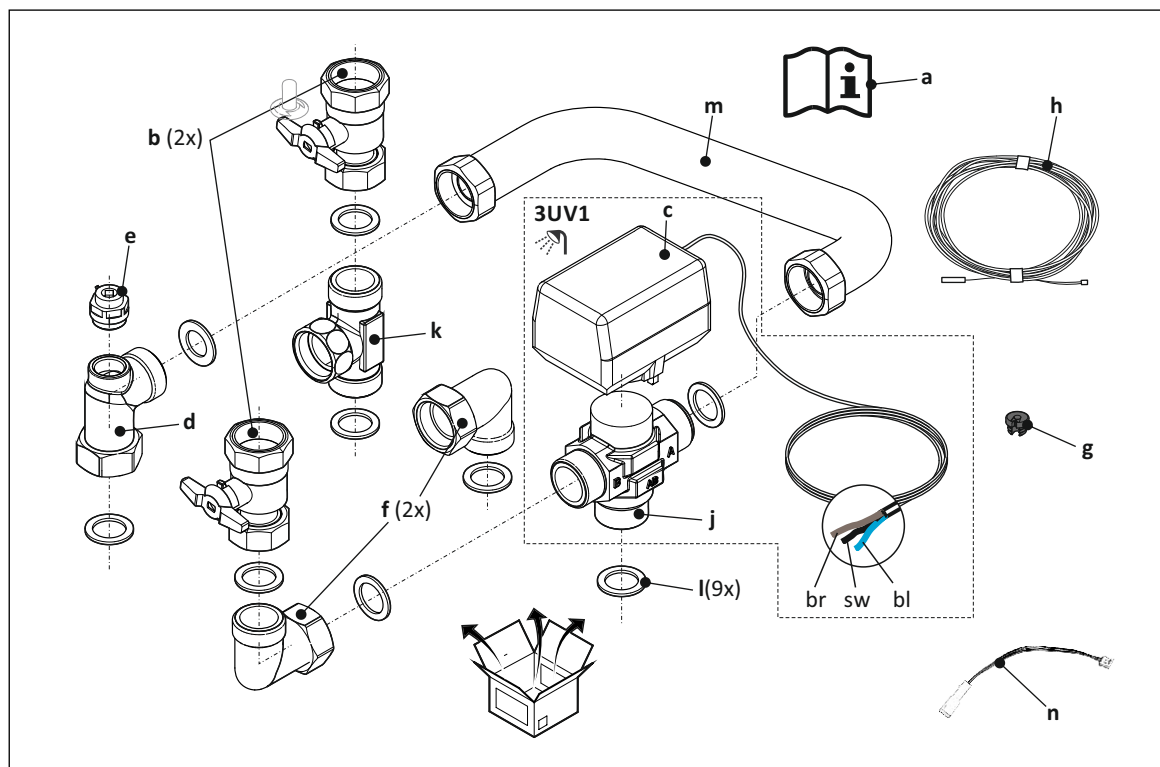

E-Pac 🛒 EKEPHT5H

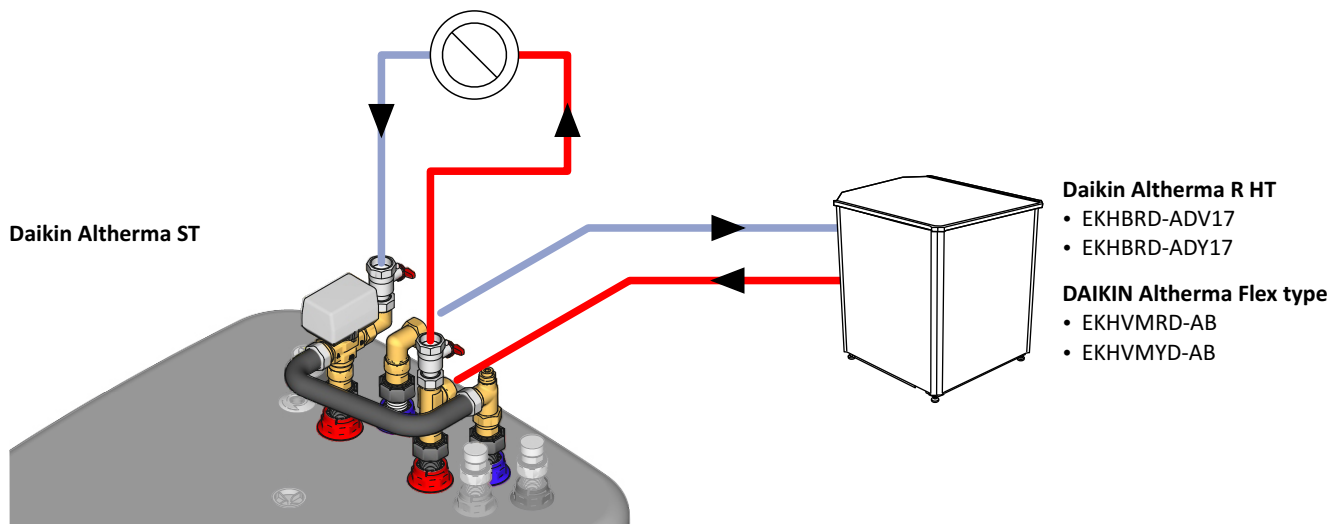

Ελληνικά

Türkçe

Svenska

Suomi

čeština







hrvatski





[EKEPHT5H]



Daikin Altherma ST

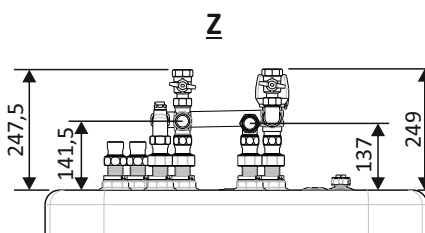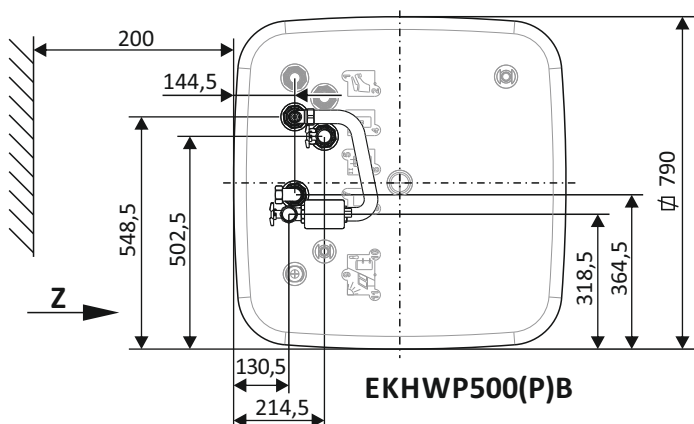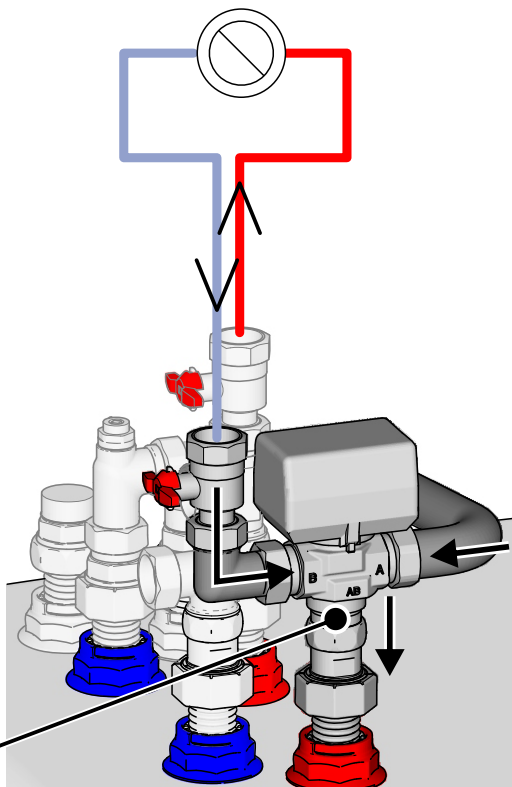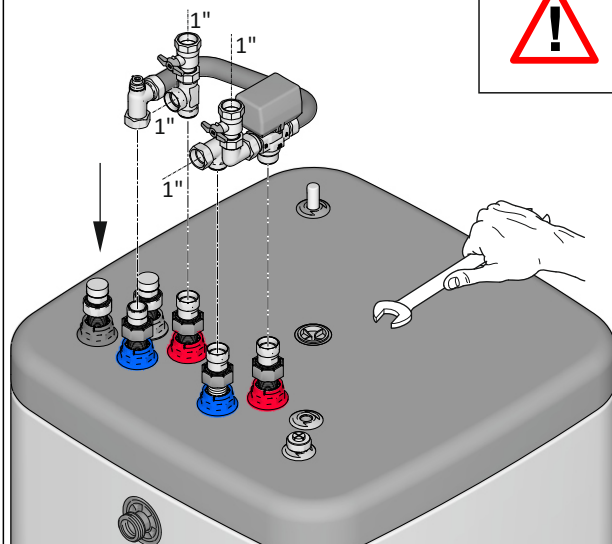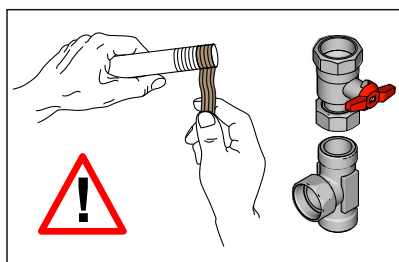

EKHWP500(P)B

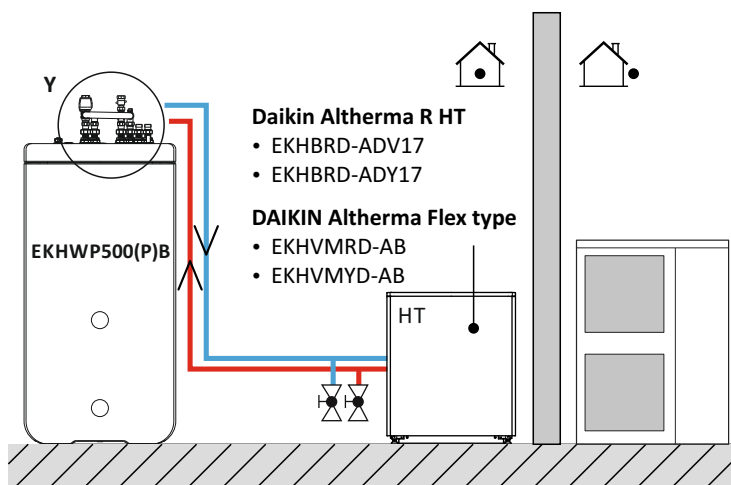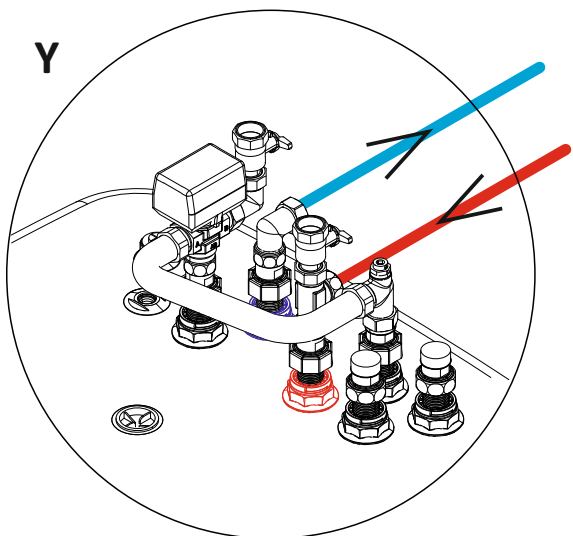

Daikin Altherma R HT

- EKHB RD-ADV17
- EKHB RD-ADY17

DAIKIN Altherma Flex type

- EKHVMRD-AB
- EKHVMYD-AB


	EL	TR	SV	Fi	CS	HR
br	καφέ	kahverengi	brun	ruskea	hnědý	smeđ
sw	μαύρος	siyah	svart	musta	černá	crna
bl	μπλε	mavi	blå	sininen	modrý	plava




Daikin Altherma R HT
Daikin Altherma Flex type

Daikin Altherma ST



EKHBRD

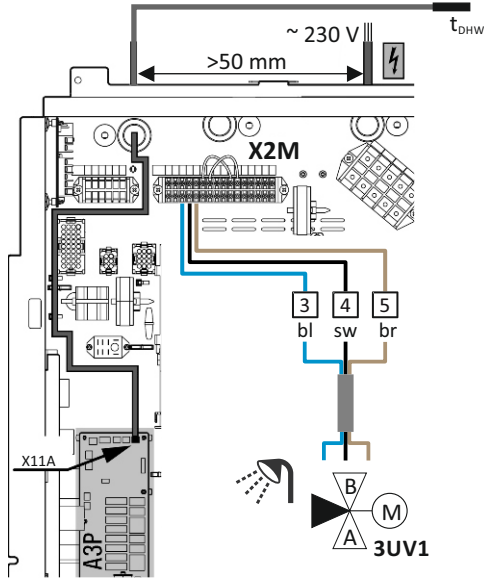

EKHVMRD

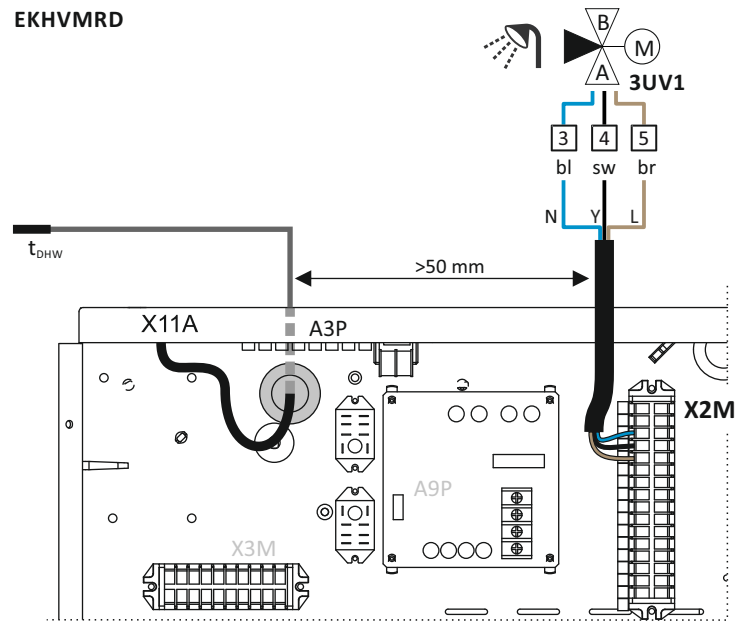


EKHVMYD

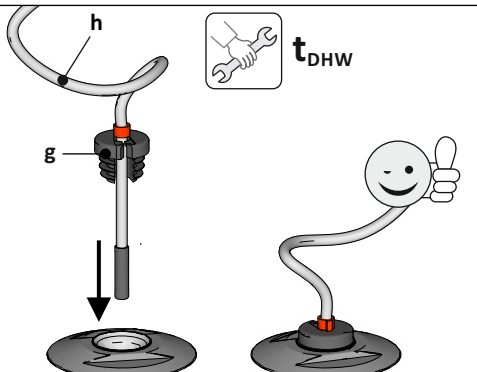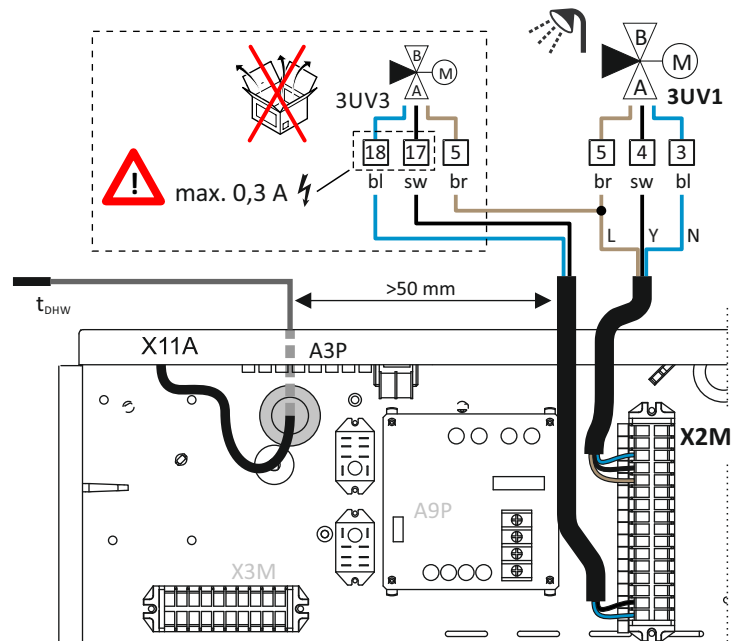


	EL	TR	SV	Fi	CS	HR
3UV1  (3UV3)	3 οδη βάνα + μηχανισμός	3 yollu vana + motor	Trevägsventil + motor	3-tieventtiili + moottori	3cestný ventil + motor	3-putni ventil + motor
t _{DHW}	Αισθητήρας + καλώδιο σύνδεσης	Termistör + bağlantı kablosu	Termistor + anslutningskabel	Termistori + yhteysjohto	Termistor + připojovací vodič	Termistor + priključni vodič
	Daikin Altherma ST					
EKHWP 500(P)B	Αισθητήρας (500 l)	Kullanım sıcak suyu boyleri (500 l)	Varmvattenberedare (500 l)	Kuumavesivaraaja (500 l)	Nádrž na teplou užitkovou vodu (500 l)	Spremník kučne vruče vode (500 l)
ERRQ /EMRQ	Daikin Altherma R Flex Type HT / outdoor unit					
	Daikin Altherma indoor unit					
EKHBRD	Daikin Altherma R HT					
EKHVMR(Y)D	DAIKIN Altherma Flex type					



[EKEPHT5H]

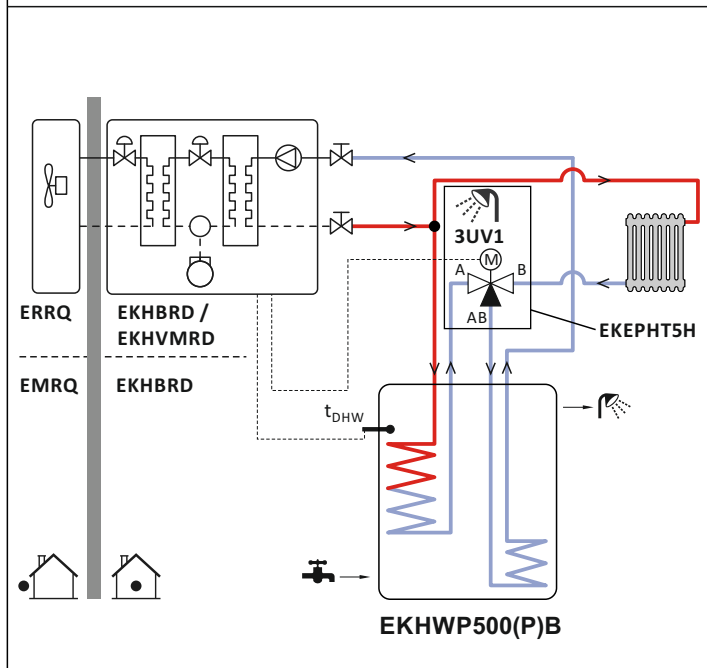


EKHB RD / EKHVMRD + EKEPHT5H

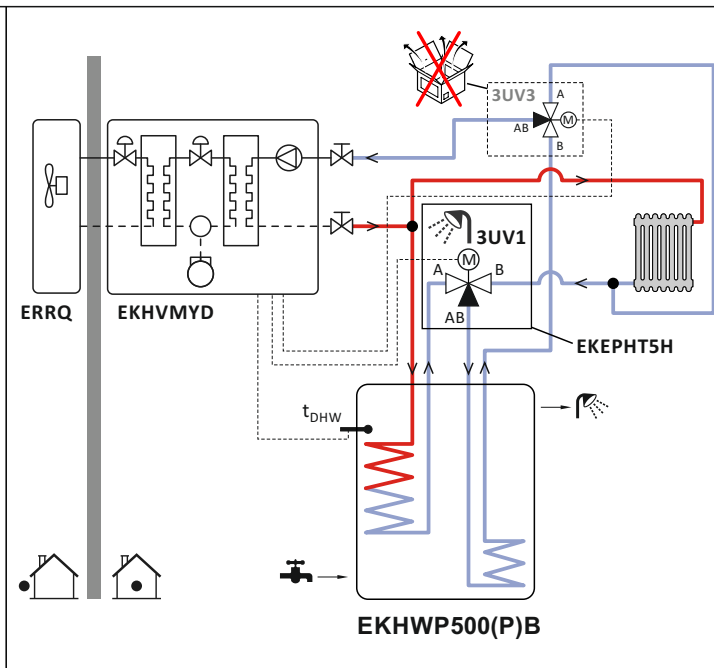

EKHVMYD + EKEPHT5H

EL	TR	SV	Fi	CS	HR	
τεχνικά δεδομένα	Teknik veri	Teknisk data	Tekniset tiedot	Technická data	Tehnički podaci	
3UV1						
3 οδὸν βάνα + μηχανισμός	3 yollu vana + motor	Trevägsventil + motor	3-tieventtiili + moottori	3cestný ventil + motor	3-putni ventil + motor	
τάση λειτουργίας	Çalışma gerilimi	Driftspänning	Käyttöjännite	Provozní napětí	Radni napon	230V / 50Hz
Μέγιστη ισχύς εισόδου	Maksimum güç girişi	Max effekt effekt	Suurin tehotulo	Maximální příkon	Maksimalni unos snage	4,3 W
Τύπος προστασίας	Koruma türü	Skyddstyp	Suojaustyyppi	Druh ochrany	Vrsta zaštite	IP 40
χρόνος μετάβασης	Geri dönüş süresi	Turnaround tid	Läpimenoaika	Doba obratu	Vrijeme obrade	6s
Συντελεστή KVS	KVS-katsayı	KVS-koefficient	KVS-kerroin	Koeficient KVS	KVS-koeficijent	7,7
Αισθητήρας δοχείου αποθήκευσης	Depolama tankı sensörü	Lagringstankens sensor	varastosäiliön anturi	Senzor zásobní nádrže	Senzor spremnika	
R_s						
Χαρακτηριστικά αντίστασης	Direnç karakteristiği	Hållfasthetskarakteristik	vastustuskyky-ominaisuus	Charakteristiky odporu	Karakteristike otpora	

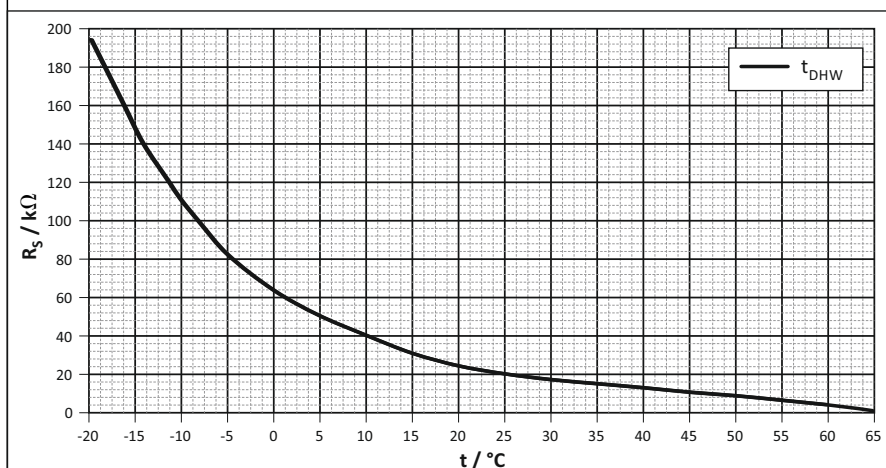

EKHB RD / EKHVM(R)(Y)D + EKEPHT5H

DAIKIN EUROPE N.V.

Zandvoordestraat 300, B-8400 Oostende, Belgium

008.1448699 02 02/2020